


QUICKSTART GUIDE

SP-03 IP AUDIO HANDS-FREE



Full User Manual

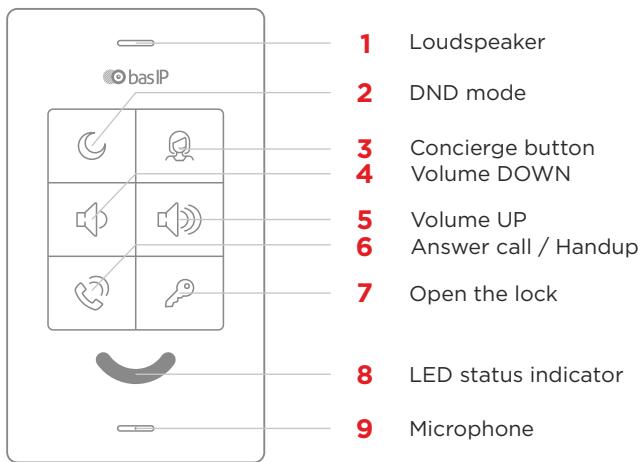

INDICATOR LIGHT STATUSES:

- Normal mode (standby mode) - constant turquoise backlight.
- Pressing the volume button during a call - flashing the turquoise backlight 1 time, then returning to the backlight of the current mode.
- Incoming / outgoing call - flashing green backlight.
- Conversation - constant green illumination.
- The microphone is turned off during a conversation - alternately flashing red and green lights.
- «Silent» mode is on - constant red backlight.
- Initialization mode in Link - alternate flashing of different backlight colors.

BUTTON FUNCTIONALITY

SP-03 has 6 buttons, each of which, with a short or long (3 seconds before the beep) press, has its own functionality.



SHORT PRESS

Enable / disable the «Do Not Disturb» mode for 8 hours from the moment it is pressed

LONG PRESS

Disabling the alarm



SHORT PRESS

Concierge call

LONG PRESS

SOS call to concierge monitor



SHORT PRESS

During outgoing and incoming calls, you can turn down the device volume. During a call, you can turn the microphone on/off

LONG PRESS

Downward lift call (with EVRC-IP module connected)



SHORT PRESS

During outgoing and incoming calls, you can increase the device volume

LONG PRESS

Lift call up (with EVRC-IP module connected)



SHORT PRESS

Accept/end an incoming call or cancel an outgoing call. In normal operation, you can call the first fixed number (if the function is enabled).

LONG PRESS

In normal operation, you can call the second fixed number (if the function is enabled)



SHORT PRESS

Open the door before answering the call or during a conversation. In normal mode, you can call the security number (if the function is enabled)

LONG PRESS

Activation of initialization in Link (automatic acquisition of settings)